

---

# STEAM OVEN

# INSTALLATION CONSIDERATIONS

---

Accessing your product specifications

3

Electrical connection

6

**FISHER & PAYKEL**

NZ AU UK IE

**MINIMAL**

OS76NMUB3, OS76NMUG3, OS76NMUNB3, OS76NMUNG3

**CONTEMPORARY**

OS76NCUDX3

**PROFESSIONAL**



OS76NPUX3



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit [fisherpaykel.com/specify](https://fisherpaykel.com/specify). Search by appliance type, product name or model code.

MINIMAL

OS76NMUB3, OS76NMUG3, OS76NMUNB3, OS76NMUNG3

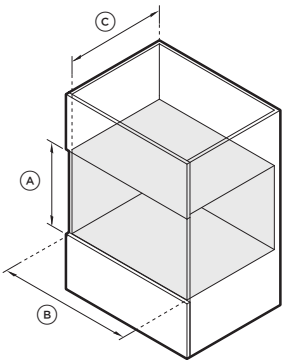

PRODUCT DIMENSIONS	mm
(A) Overall height	458
(B) Overall width	758
(C) Chassis height	435
(D) Chassis width	720
(E) Chassis depth	545
(F) Control panel thickness	20

CAVITY DIMENSIONS	mm
(A) Minimum inside height of cavity	440
(B) Minimum inside width of cavity	724
(C) Minimum inside depth of cavity*	550
Recommended cabinet height	460
Recommended cabinet width	762



\*Measured from front of chassis.

## ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit [fisherpaykel.com/specify](https://fisherpaykel.com/specify). Search by appliance type, product name or model code.

### CONTEMPORARY OS76NCUDX3

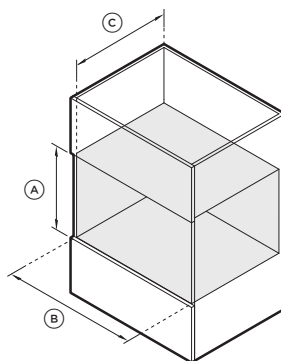

PRODUCT DIMENSIONS	mm
(A) Overall height	458
(B) Overall width	758
(C) Chassis height	435
(D) Chassis width	720
(E) Chassis depth	545
(F) Control panel thickness	20

CAVITY DIMENSIONS	mm
(A) Minimum inside height of cavity	440
(B) Minimum inside width of cavity	724
(C) Minimum inside depth of cavity*	550
Recommended cabinet height	460
Recommended cabinet width	762



\*Measured from front of chassis.

## ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit [fisherpaykel.com/specify](https://fisherpaykel.com/specify). Search by appliance type, product name or model code.

### PROFESSIONAL OS76NPUX3

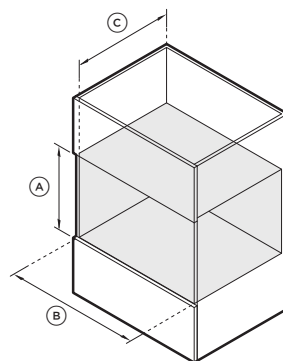

PRODUCT DIMENSIONS	mm
(A) Overall height	458
(B) Overall width	758
(C) Chassis height	435
(D) Chassis width	720
(E) Chassis depth	545
(F) Control panel thickness	24

CAVITY DIMENSIONS	mm
(A) Minimum inside height of cavity	440
(B) Minimum inside width of cavity	724
(C) Minimum inside depth of cavity*	550
Recommended cabinet height	460
Recommended cabinet width	762

\*Measured from front of chassis.

# ELECTRICAL CONNECTION

SPECIFICATIONS	OS76 MODELS
SERVICE (A)	20
SUPPLY (Hz)	50
VOLTAGE (V)	220 - 240V



