

# 60cm Series 9 Integrated Dual Zone Refrigerator

Integrated




Pair with the Integrated Dual Zone Freezer for the ultimate kitchen solution – this model features two independent food zones taking cooling flexibility to a new level.\*

- Customise with your own kitchen cabinetry or purchase our stainless steel door panel accessory
- Flush fit design with 4mm gaps and custom height installation
- Two independent food zones with adjustable temperature from 1 to 6°C
- Easy-to-use touch-control panel and Wi-Fi capability

## DIMENSIONS

Height	1870 mm
Width	592 mm
Depth	576 mm

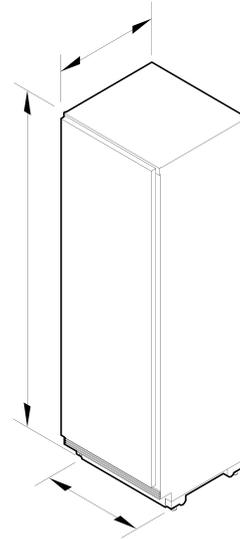

## FEATURES & BENEFITS

### Perfect Fit

These models fit flush, with only 4mm gaps around them and no visible hinges or grilles. Our Integrated models can be seamlessly hidden behind your cabinetry, or you can purchase our stainless steel door panel.

### Independent Food Zones

When it comes to optimal food preservation, one temperature does not fit all. With two independent food zones, you can create the perfect climate for storing different foods. Each zone has adjustable temperature from 1°C to 6°C, ideal for items such as fruit and vegetables, dairy products, meats and leftovers.

### Mix & Match

These modular refrigerators and freezers can be mixed and matched, with different sizes and finishes. Installed side by side or individually throughout the kitchen, you can create a cooling solution to suit your lifestyle. Customise with your own kitchen cabinetry and handles, or purchase our stainless steel door panel and handle options.

### Clever Energy

ActiveSmart™ Foodcare learns how you live. It is technology that understands how you use your refrigerator and adjusts temperature, airflow and humidity inside to help keep food fresher for longer.

### Flexible Storage

Designed to make it simple for you to store, access and remove food, this refrigerator includes LED-lit adjustable cantilevered shelving and full extension veggie bins.

### Simple Installation

Our Integrated products are easy to install, whether you are renovating your kitchen or designing a new one. Adjustable front and rear feet allow for uneven floors alongside adjustable door panels that can be customised to match your kitchen. These models are designed to easily slide into place as separate units – a perfect fit for European design kitchens.

### Ease Of Use

Using the intuitive touch-sensitive control panel, you can easily adjust the temperature to suit. Beautiful to use, the refrigerator door is family safe with a soft-close mechanism.

## SPECIFICATIONS

**Accessories (included)**

Hinge change (from right hinge to left hinge)	•
---	---

**Accessories (sold separately)**

Door panel set stainless steel	<b>Right &amp; Left hinge RD6019</b>
Handle kit Classic	<b>AHCLRDSF</b>
Handle kit Contemporary round, aluminium	<b>AHSRDSF</b>
Handle kit Contemporary square fine, aluminium	<b>AHD5RDSF</b>
Handle kit Contemporary square fine, black	<b>AHD5RDSFB</b>
Handle kit Professional round flush	<b>AHP3RDSF</b>
Joiner kit	<b>AJRS19LR</b>
Toe kick stainless steel 1200mm	<b>AKRS12010</b>
Toe kick stainless steel 1800mm	<b>AKRS18010</b>
Toe kick stainless steel 600mm	<b>AKRS06010</b>

**Capacity**

Total gross capacity	<b>338 L</b>
Volume	<b>314 L</b>
Volume refrigerator	<b>314 L</b>

**Consumption**

Energy rating	<b>5 star</b>
Energy usage	<b>132kWh/year</b>
In-use energy carbon emissions estimate	<b>12.5kgCO2e/year</b>

**Features**

Adjustable door shelves	<b>4</b>
Adjustable glass cantilevered shelves	•
Covered door shelves	<b>1</b>
Door alarm	•
LED ceiling lighting	•
Smart appliance	•
SmartTouch control panel	•
Stackable bottle holders	<b>2</b>

**Installation Dimensions**

Minimum inside width of cabinetry frame	<b>600 mm</b>
Minimum internal depth of cabinetry	<b>600 mm</b>
Minimum internal height of cabinetry	<b>1880 mm</b>

**Performance**

ActiveSmart™ Foodcare	•
Adaptive defrost	•
Dual evaporator	•
Frost free	•
Humidity control system	•
Humidity controlled crisper bins	<b>2</b>
Inverter controlled compressor	•
Sabbath mode	•

**Power requirements**

Rated current	<b>10 A</b>
Supply frequency	<b>50 Hz</b>

Supply voltage	<b>230 V</b>
----------------	--------------

**Product dimensions**

Depth	<b>576 mm</b>
Height	<b>1870 mm</b>
Width	<b>592 mm</b>

SKU	26196
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

**Other product downloads available at fisherpaykel.com**

- [↓](#) DWG
- [↓](#) DWG
- [↓](#) DWG
- [↓](#) DXF
- [↓](#) DXF
- [↓](#) DXF
- [↓](#) DXF
- [↓](#) Archicad
- [↓](#) Energy Label
- [↓](#) Installation Guide - Assisted Opening Accessory - Integrated Refrigeration (English)
- [↓](#) Installation Guide (English)
- [↓](#) Planning Guide - Assisted Opening Accessory (English)

- [↓ Planning Guide \(English\)](#)
- [↓ Revit](#)
- [↓ Rhino](#)
- [↓ Rhino - Custom Panel](#)
- [↓ Rhino - Door and Classic Round Handle](#)
- [↓ Rhino - Door and Contemporary Round Handle](#)
- [↓ Rhino - Door and Professional Round Flush Handle](#)
- [↓ Rhino - Door and Square Fine Black Handle](#)
- [↓ Rhino - Door and Square Fine Handle](#)
- [↓ SketchUp](#)
- [↓ SketchUp - Custom Panel](#)
- [↓ SketchUp - Door and Classic Round Handle](#)
- [↓ SketchUp - Door and Contemporary Round Handle](#)
- [↓ SketchUp - Door and Professional Round Flush Handle](#)
- [↓ SketchUp - Door and Square Fine Black Handle](#)
- [↓ SketchUp - Door and Square Fine Handle](#)
- [↓ User Guide \(English\)](#)
- [↓ Installation Video](#)



## A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 0800 372 273 W [www.fisherpaykel.com](http://www.fisherpaykel.com)

### Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.