Integrated Insert Cooker Hood, 60cm

Integrated




Integrates seamlessly into the cabinetry above your cooktop, with stainless steel and black glass. Quiet efficiency.

- With four fan speeds, plus boost function, select the perfect extraction rate for your cooking
- Powerful maximum air movement 687m³/hr
- Dishwasher safe filters that are easy to remove and clean

DIMENSIONS

Height	**352 mm**
Width	**530 mm**
Depth	**280 mm**

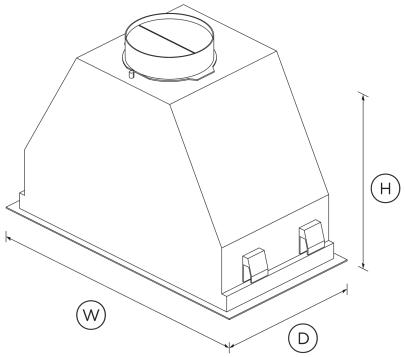

FEATURES & BENEFITS

Effective and quiet

Odours can linger in the kitchen well after cooking is finished. This cooker hood offers four fan speeds plus a boost function for powerful extraction to quickly remove steam and odours. The timer keeps the cooker hood working for up to 15 minutes before automatically turning off.

Easy cleaning

The glass and stainless steel finishes are easily wiped clean and the filters removable and dishwasher safe. An alert reminds you when to clean the filter to ensure you get the best performance out of your cooker hood.

Simple to use

The intuitive control panel responds to the touch of your finger. Low-power LED lighting keeps energy usage to a minimum while providing superb illumination over the entire cooking surface.

Designed to match

This cooker hood can be built into your cabinetry for a seamless look. Its black glass control panel and stainless steel finish is designed to match the rest of Fisher & Paykel's kitchen appliance family.

SPECIFICATIONS

Accessories (included)

Aluminium filter	**792429**

Accessories (sold separately)

Eave ducting kit	**RHK150E**
Light bulb	**792556**
Recirculation carbon filter	**792481**
Side wall ducting kit	**RHK150W**

Consumption

Energy rating	**A**
Energy usage	**42kWh/year**
In-use energy carbon emissions estimate	**12.0kgCO2e/year**

Fan ratings

Maximum air movement	**687 m³/hr**

Maximum pressured air movement EN61591 at boost	**687 m³/hr**
Maximum sound rating	**74 dB**

Installation and cleaning

Air outlet size	**150 mm**
Dishwasher safe filters	**2**
Ducted	**Top extraction**
Recirculation	**Optional - top extraction**

Performance

Extraction type	**Perimeter**
Fan speeds	**4**
Filter type	**Mesh with perimeter extraction**
Number of filters	**2**

Power requirements

Lighting power	**7 W**
Motor power	**130 W**
Rated current	**3 A**
Supply frequency	**50 Hz**
Supply voltage	**220-240 V**
Total Power	**137 W**

Product dimensions

Depth	**280 mm**
Height	**352 mm**
Width	**530 mm**

Ventilation features

Dimmable lights	•
Light type	**LED**
Timer function	•

SKU 50126

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- DWG
- DXF
- Archicad
- Data Sheet (English)
- Energy Label
- Energy Label
- Installation Guide (English)
- Product Information Sheet Wall Rangehood
- Revit
- Rhino
- SketchUp
- User Guide (English)

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.

24/7

A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1800 625174 **W**www.fisherpaykel.com